HEBEI SINOSTAR

HEBEI SINOSTAR TRADING CO., LTD.

Tel: +86-311-8603 9188 / 311-6726 3625 / 311-8699 9716

Fax: +86-311-8607 3288

Email: sales@hbsinostar.com

Website: www.hbsinostar.com

Address: No. 39, Xiangyi Road, Xinhua District, Shijiazhuang, Hebei, China

WEBSITE WECHAT

HEBEI SINOSTAR

FITTINGS AND VALVES

GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM FOR BUILDING MATERIALS & HARDWARE

HEBEI SINOSTAR TRADING CO., LTD.

QUALITY / SERVICE / HONESTY / SPECIALTY / INNOVATION



CONTENTS

About Hebei Sinostar

Company Profile 01

Why Hebei Sinostar 03

Pipe Fittings

Malleable Iron Pipe Fitting 06

Butt-welding Pipe Fitting 08

Flange 09

Stainless Steel Pipe Fitting 10

Forged Pipe Fitting 12

Socket and Steel Pipe Nipple 13

Flexible Rubber Joint 14

Grooved Pipe Fitting 16

Valves

Stainless Steel Ball Valve 18

Ductile Iron Valve Series 19

Brass Valve Series 24

PPR Fitting 30

PPR & PVC Valve Series 31

PVC-U Pipes & Fitting 33

Company Profile

Founded in 2005, Hebei Sinostar Group is a growth-oriented export enterprise with over 20 years of experience in the building materials and hardware industry.

Building Materials and Hardware remain the core business and strategic foundation of Hebei Sinostar Group, forming the backbone of our long-term development. Our products cover a full range of building materials and hardware solutions, including Iron Wire and Wire Mesh, Metal Fencing Systems, Fasteners and Screws, Iron Nails, Metal Pipes, Roofing Sheets, Pipe Fittings and Valves, Scaffolding, Safety Ladders, Iron Art, and Garden Metalware Products. Our main markets involve the EU, Middle & South America, Southeast Asia, the Middle East, and Africa.

Supported by over 500 certified long-term manufacturing partners, we serve large home centers, contractors, traders, and wholesalers with the best quality products, the most competitive prices, and the most intimate service.

Delivering Responsible Growth

At Hebei Sinostar, we share a common noble aspiration: To fulfill our mission through responsible growth.

As a one-stop building materials and hardware sourcing solutions supplier, we are committed to providing our clients we serve with the best quality products, the most competitive price, and the most intimate service to create tangible value for their business.

GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE

Our Mission

To be the world's most customer-centric enterprise, offering superior cost-performance products andmost efficient services.

Our Vision

To be the world's most trustworthy enterprise, consistently delivering value and innovative experiences beyond expectations.

Our Core Values

Quality Our QC inspectors monitor the whole process of production of each order to make sure the quality fully meets the market and customers' needs.

Service We always adhere to the philosophy of "customer-centered, market-oriented", and continuously provide high-quality services to our customers.

Honesty Honesty is essential in any lasting business and partnership. We consider from the perspective of our customers, we act in an open and transparent way to realize customers value.

Specialty Professional skills are the foundation of high-quality services. Our professional and dedicated team members make customers' business easier and safer.

Innovation Innovation is the key factor of the continuous company success. Driven by the customer needs, we are always focused on innovation and development to improve our customer satisfaction.

By driving responsible growth, Hebei Sinostar Group is committed to growing together with our clients, suppliers, shareholders, and employees, creating tangible value across the entire supply chain.



Why Hebei Sinostar

Supply Chain Management System

Supply Chain Integration: With professional supply chain team and over 20 years of industry experience, we integrate 500+ certified suppliers through standardized qualification, audits, testing, and continuous performance evaluation.

This structured integration ensures stable capacity, consistent quality standards, reliable delivery, and reduced single-source dependency.

Risk Management: We Have To Grow Within Our Risk Framework. Managing risk well is foundational to responsible growth. It contributes to the strength and sustainability of our company and our customers for the future.

Everyone has a role to play in managing risk. All employees are responsible for proactively managing risk as part of their day-to-day activities through prompt identification of product liability and capital risks.

Logistics Assurance: With two decades of operational excellence and a globally optimized network, we deliver fully digitized logistics solutions encompassing procurement, warehousing, transportation, and customs clearance.

By embedding value creation into every supply chain node and leveraging our robust logistics infrastructure, we provide enterprise-grade "safety, efficiency, and sustainability" assurances to global clients.

Digital Supply Chain Services: Digitalization is a core enterprise-level strategy at Hebei Sinostar. We operate end-to-end digitalized, standardized, and automated supply chain systems, covering order processing, production tracking, quality inspection, logistics execution, and shipment release.

This system-level control ensures transparency, traceability, and execution discipline, transforming efficiency into measurable customer value.

One-Stop Sourcing Solution: Hebei Sinostar offers one-stop building materials and hardware sourcing solutions, designed to meet different customer types and project scenarios.

We help customers reduce supplier complexity, shorten sourcing cycles, and improve procurement efficiency, and ensuring product quality and cost control.

Financial Support: Hebei Sinostar provides risk-controlled, operation-aligned financial support options designed to match real business cycles, helping customers improve capital efficiency.

By integrating business execution with financial management, we help partners improve cash flow efficiency while maintaining disciplined capital risk control.

Quality Management System

Hebei Sinostar has introduced an advanced quality control system and customized testing solutions with comprehensive quality control throughout the entire process.

The testing data is integrated in real-time into our ERP and QMS systems, creating a traceable quality control system covering the entire process from raw materials, samples, production, processing, finished products, to warehousing, packaging, and port shipment.

Hebei Sinostar is certified to ISO 9001:2015, ISO 45001:2018, and ISO 14001:2015.



ISO 45001:2018




ISO 9001:2015



ISO 14001:2015

Digital Quality Inspection Tool--QARMA

Adopted by Hebei Sinostar, enhances its ability to maintain and uphold the highest standards across all stages of production.

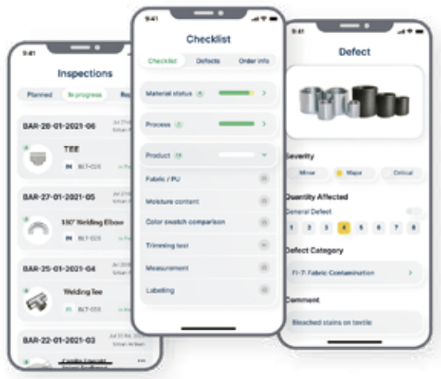

Covering every step of the inspection process



Planning & scheduling for inspector



Generating reports, analytics, and insights

Malleable Iron Pipe Fitting

Threaded: ISO7-1; NPT; BSPT
Size Avaliable: 1/8"-- 6"

Type: Banded Type; Beaded Type; Plain Type
Finishing: Hot Dipped Galvanized/ Black Painting/ Black



1 M&F Long Sweep Bends



40 M&F Long Sweep Bends



2 Long Sweep Bends



41 Long Sweep Bends



85 Crossovers



90 Elbows



92 M&F Elbows



120 45° Elbows




130 Tees




165 Y 45° Tees

180 Crosshead Female


221 Side Oulet Elbows



270 Entire Thread Sockets



270 Part Thread Sockets



280 Hexagon Nipples



290 Beaded Plugs




291 Plain Plugs



300 Caps



301 Round Caps



310 Backnuts

GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE



321 No Hole Flange



329 Flange



330 Union, Flat Seat



331 M&F Unions, Flat Seat



340 Unions, taper seat



341 M&F Unions, Taper Seat



342 Brass Unions, Taper Seat



343 M&F Brass Unions, Taper Seat



471 Wall Elbow



529 M&F Socket



95 Union Elbows Flat Seat FF



96 Angle Union, Conical Seat FF



97 Union Elbows Flat Seat MF



98 Angle Union, Conical Seat MF



90R Elbows, Reducing



130R Tees, Reducing



180R Crosses. Reducing



240 Sockets. Reducing



246 M&f Socket. RXeducing



241 Bushings

245 Nipples, Reducing

131R Tees Reducing

90 Black Elbow

92 Black M&f Elbow

Butt-welding Pipe Fitting

Commodity	Butt-Welding Pipe Fitting			
Standard	ANSI/ASME B16.9/B16.28	DIN2605,2615, 2616,2617	JISB2311	GOST17375-2001 GOST17378-2001
Wall Thickness	SCH5,SCH10S, SCH10,SCH20, SCH30,ST-D,SCH40, XS,SCH60, SCH80,SCH100, SCH120,SCH140, SCH160,XXS	2mm-25mm	FSGP,LG,STD,XS	2mm-25mm
Size	1/2"-24"Seamless 4"-72" Seam-welded	1/2"-24"Seamless 4"-72" Seam-welded	1/2"-24"Seamless 4"-72" Seam-welded	1/2"-24"Seamless 4"-72" Seam-welded
Material	Carbon Steel ASTM A234 WPB, A420,A106	CS ST37.2 S235JR	CS JIS G3452 SS400	CS ct20, 16Mn
Product Range	Elbow LR/ SR, 45/ 90/ 180DEG Tee STRAIGHT/ Reducing Reducer Concentric/ ECCENTRIC Cap Cross	DIN2605 Elbow 2D/ 3D/ 5D, 45/ 90/ 180DEG DIN2615 Tee STRAIGHE/ Reducing DIN2616 Reducer Concentric/ ECCENTRIC DIN2617 Cap	ELBOW LR/ SR, 45/ 90/ 180DEG Tee STRAIGHT/ Reducing Reducer Concentric/ ECCENTRIC Cap, Cross	ELBOW LR/ SR, 45/ 90/ 180DEG Tee STRAIGHT/ Reducing Reducer Concentric/ ECCENTRIC Cap, Cross
Coating	Black Paint, Galvanized	Rust-proof Oil, Galvanized	Rust-proof Oil, Galvanized	Rust-proof Oil





Flange

Commodity	Standard	Pressure	Type	Size	Material	Coating
Flange	ANSI B16.5	CLASS 150, 300, 600, 900, 1500, 2500	Slip On Welding Neck Blind Lap Joint Threaded	1/2"-48"	CS SA105/ SA105N, RST37.2 SS304/ 304L, 316/ 316L	Black, Yellow Paint; Rust-proof Oil
	DIN	PN6, PN10, PN16, PN25, PN40, PN64, PN100	Welding Neck Din2631, 2632, 2633etc. Plate Din 2573, 2576, 2502etc. Blind Din2527 Screwed Din2565, 2566 Lapped Din2641, 2642etc.	DN15-DN2000	CS RST37.2; S235JR SS304/ 304L, 316/ 316L	Rust-proof Oil; Yellow Paint; Galvanized
	BS4504	PN6, PN10, PN16, PN25, PN40, PN64, PN100	Plate Blind Welding Neck Slip On Threaded	DN15-DN2000	CS RST37.2; S235JR; C22.8 SS304/ 304L, 316/ 316L	Rust-proof Oil; Yellow Paint; Galvanized
	BS10 TABLE D/E	/	Slip On Welding Neck Threaded Plate	DN15-DN600	CS RST37.2; S235JR; SS304/ 304L, 316/ 316L	Rust-proof Oil; Yellow Paint; Galvanized
	EN1092-1:2002	PN6, PN10, PN16, PN25, PN40, PN64, PN100	Welding Neck Slip On Threaded Plate Lapped Blind	DN15-DN2000	CS RST37.2; S235JR; C22.8 SS304/ 304L, 316/ 316L	Rust-proof Oil; Yellow Paint; Galvanized
	GOST	PN6, PN10, PN16, PN25, PN40, PN63	Plate Rf Welding Neck Blind	DN10-DN1600	CS CT20,16MN SS304/ 304L, 316/ 316L	Rust-proof Oil
	JIS	5K, 10K, 16K, 20K, 30K	Jis Sop Jis Soh Jis Blind	15A-1500A	CS SS400 SS304/ 304L, 316/ 316L	Rust-proof Oil; Yellow Paint; Galvanized

Stainless Steel Pipe Fitting

201/304/304L/316/316L



90° Elbow



Tee



Cross



45° Elbow



340 Union



Plug



Socket Banded



Hexagon nipple



Cap



Stree Elbow



Hexagon Plug



Reducer socket

GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE



90° Welding Elbow



45° Welding Elbow Short Radius



45° Welding Elbow Long Radius



180° Welding Elbow



Welding Tee



Welding Crosses



Welding Cap



180° Elbow



90° Elbow



45° Elbow



Reducer Tee



Equal Tee



Con. Reducer



Eccentric Reducers



Cross

Forged Pipe Fitting (Socket and Threaded)

Standard: ASTM/ DIN/ JIS
Material: CSA105/ SS304/ SS316
Pressure: 3000LBS/ 6000LBS/ 9000LBS
Size: 1/8"-4"



Socket 45° Elbow



Socket 90°Elbow



Socket Cross



Socket Union



Socket Coupling



Sockolet



Threaded 90° Elbow



Threaded Tee



Street Elbow



Threaded Cross



Threaded Coupling



Threaded Olet

GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE

Socket and Steel Pipe Nipple

Steel Socket

Standard: DIN-2999; ASTM A865; BS STANDARD;
Size: 1/8"-4"
Surface: Black, Hot-dipped Galv.; Electro Galv.



Steel Hose Nipples

Standard: Din-2999; Astm A733; Bs 1387;
Size: 1/8"-4"
Surface: Black, Hot-dipped Galv.; Electro Galv.





Flexible Rubber Joint

Single Ball Flexible Rubber Joint

Technical Conditions

Specification	11/4"-24"		
Flange Connection Standard	Ansi Din Jis Bs4504		
Items	Ⅰ	Ⅱ	Ⅲ
Working Pressure Mpa（Kgf/cm²）	1.0(10)	1.6(16)	2.5(25)
Explosion Pressure Mpa（Kgf/cm²）	2.0(20)	3.0(30)	4.5(45)
Vacuum Kpa（Mm/hg）	53.3(400)	86.7(650)	100(750)
Applicable Temperature℃	-15℃～+115℃（For Special Conditions, It Can -30～+250℃）		
Applicable Media	Water, Seawater, Steam, Acid And Alkali Etc.		



Thread-connection Rubber Joint

Specification	3/4"-3"		
Thread Standard	Asme B1.20.1		
Working Pressure Mpa（Kgf/c㎡）	16mpa(16kg.f/ Cn2)	Deflexion Angle	（A1+a2) 45°
Explosion Pressure Mpa（Kgf/c㎡）	4.8mpa(48kg.f/ Cn2)	Vacuum	53.3kpa（400mmhg)
Applicable Temperature℃	-15℃～+115℃（For Special Conditions, It Can -30～+250℃）		
Applicable Media	Water, Seawater, Steam, Acid and Alkali etc.		

GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE



Grooved Pipe Fitting

Material	Astm A536,grade 65-45-12,qt450-10
Threads	Thread: Bspt(Iso 7/1), Npt(Ansi B1.20.1), Gb7306
Surface	Painted/ Hot Dipped Galvanized/ Black/ Expoxy
Color	Expoxy Power: Red, White, Blue, Yellow, Green
Model	Elbow, Tees, Crosses, Bends, Unions, Bushing, Sockets, Nipples, Caps, Plugs, Flanges
Connection	Male, Female Threaded
Shape	Equal, Reducing
Certificate	Fm, Ul, Ce, As4020, Bsi, Iso9001
Application	Suitable For Fire Piping System, Air, Steam, Water, Gas, Oil, Home Decoration, Equipment
	Buyer's Drawing Or Designs Are Available
Package	Cartons Without Pallet
	Cartons With Pallet
	Double Woven Bags
	Or As Buyer's Requirements
Delivery Details	According To The Quantities And Specifications Of Each Order
	Normal Delivery Times Is From 30 To 45 Days After Receiving The Deposit



Stainless Steel Ball Valve



Main Parts and materials		1/2"-2"	
No.	Part Name	Material	
		Stainless steel	Carbon steel
1	Body	SS201/ SS304/ SS316	WCB
2	Ball	SS201/ SS304/ SS316	SS201/ SS304/ SS316
3	Joint Ring	PTFE/ RPTFE/ PEEK	PTFE/ RPTFE/ PEEK
4	Joint Gasket	PTFE	PTFE
5	Cap	SS201/ SS304/ SS316	WCB
6	Tem	SS201/ SS304/ SS316	SS201/ SS304/ SS316
7	Thrust	PTFE	PTFE
8	Stem Packing	PTFE	PTFE
9	Gland	SS201/ SS304/ SS316	SS201/ SS304/ SS316
10	Handle	SS201/ SS304/ SS316	SS201/ SS304/ SS316
11	Hand Washer	SS201/ SS304/ SS316	SS201/ SS304/ SS316
12	Stem Nut	SS201/ SS304/ SS316	SS201/ SS304/ SS316
13	Handle Cover	Plastic	Plastic

Related Product Display

Part Name	Material		
Body	WCB	CF8	CF8M
Cap	WCB	CF8	CF8M
Disc	CF8	CF8	CF8M
Seal Ring	304, 316, PTFE		
Gaskets	PTFE		



2PC Flanged Ball Valve



Swing Check Valve



Spring Check Valve



Y-Strainer

Ductile Iron Valve Series



Butterfly Valve

No.	Name	Material	Specification				Remark
			ASTM	DIN	EN	JIS	
1	Body	Cast Iron	ASTM A126B	GG25	EN-GJS-250	FC200	/
		Ductile Iron	ASTM A536	GGG40	EN-GJS-400	FCD450	
		Carbon Steel	A216 WCB	GS-C25	GP 240 GH+N	SCPH 2	
		Stainless Steel	A351 CF8M	1.4408	BS970 304 S15	SCS14	
			A351 CF8	1.4301	BS970 316 S15	SCS13	
2	Disc	Plated Ductile Iron	ASTM A536	GGG40	EN-GJS-400	FCD450	PTFE Or Nylon Coated Disc are All Available
		Aluminum Bronze	B148-954	C954	EN1982 CC491K	ABLC2	
		Stainless Steel	A351 CF8M	1.4408	BS970 304 S15	SCS14	
		Stainless Steel	A351 CF8	1.4301	BS970 316 S15	SCS13	
		Carbon Steel	A126 WCB	GS-C25	GP 240 GH+K	SCPH 2	
3	Stem	Carbon steel	A216 WCB	GS-C25	GP 240 GH+N	SCPH 2	/
		Stainless Steel	A276-410	1.4201	BS970 410-S21	SUS 410	
			A276-304	1.4301	BS970 304 S15	SCS13	
			A276-316	1.4408	BS970 316 S15	SCS14	
			A276-316L	1.4401	BS970 316L	SCS14A	
4	Seat	Nbr(Nitrile)	/	/	/	/	-20℃-80℃
		Epdm	/	/	/	/	-25℃-110℃
		Hear Resistant Epdm	/	/	/	/	-25℃-130℃
		Neoprene(Cr)	/	/	/	/	-25℃-110℃
		Hypalon(Csm)	/	/	/	/	-30℃-120℃
		Viton(Fkm)	/	/	/	/	-20℃-200℃
		Natural Rubber(Nr)	/	/	/	/	-30℃-70℃
		Ptfe Cover Nbr	/	/	/	/	-20℃-150℃
		Full Ptfe	/	/	/	/	-20℃-180℃
		Silicon(Q)	/	/	/	/	-60℃-250℃
5	Pin	Stainless Steel	A182 F6A	1.4201	BS970 410-S21	SUS 410	/
			A182 F304	1.4301	BS970 304 S15	SCS13	
			A182 F316	1.4408	BS970 316 S15	SCS14	
6	Bushing	Ptfe	/	/	/	/	/
		Bronze	B62	/	/	BC62	
7	O-Ring	Nbr	/	/	/	/	-20℃-80℃
		Epdm	/	/	/	/	-25℃-110℃



Gate Valve





Part No.	Part	Standard Specification	Options
1	Valve Body	ASTM A536, 65-45-12	/
2	Resilient Wedge Disc	ASTM A536, 65-45-12+SPDM	/
3	Stem	Stainless Steel	AISI 304, AISI 316, AISI 420, AISI 431
4	Bonnet Gasket	EPDM	NBR
5	Bonnet	ASTM A536, 65-45-12	/
6	O-Ring	NBR	EPDM
7	Gland	ASTM A536, 65-45-12	/
8	Handwheel	ASTM A536, 65-45-12	Pressed Steel
9	Bolt	Carbon Steel Zinc Plated	AISI 304, AISI 316
10	Flat Washer	Carbon Steel Zinc Plated	AISI 304, AISI 316
11	Ring Wiper	EPDM	NBR
12	O-Ring	NBR	EPDM
13	Nut	Carbon Steel Zinc Plated	AISI 304, AISI 316
14	Axis Guide	Brass Hpb59-1	/
15	Washer	Brass Hpb59-1	/
16	O-Ring	NBR	EPDM
17	Nut	Carbon Steel Zinc Plated	AISI 304, AISI 316
18	Wedge Nut	Brass Hpb59-1	Bronze ZQSn5-5-5
Size(inch)		2"-24"	

Check Valve





Part No.	Part	Standard Specification	Options
1	Valve Body	ASTM A536, 65-45-12	/
2	Stem	AISI 420	AISI 304, AISI 316, AISI 416
3	Spring	AISI 304	AISI 316
4	Disc	ASTM A536, 65-45-12	AISI 304, AISI 316, AL-Bronze UNC 95400
5	Rubber Seat	EPDM	NBR

Dimensions(mm)					
Inch	mm	L	ΦA	ΦB	ΦC
2"	50	54	102	64	46
2.5"	65	54	121	78	60
3"	80	57	134	94	70
4"	100	64	162	117	84
5"	125	70	192	145	115
6"	150	76	217	170	134
8"	200	95	273	224	184
10"	250	108	328	265	220
12"	300	143	407	310	260
14"	350	184	449	360	302
16"	400	192	511	410	350
18"	450	203	544	450	385

Y-Strainer



Material Specification			
Part No.	Part	Standard Specification	Options
1	Body	ASTM A536, 65-45-12	GGG50/ GG25
2	Screen	ANSI 304/ 316	ANSI 304/ 316
3	Gasket	Graphite+Acanthopore Plate	EPDM/ NBR
4	Bonnet	ASTM A536, 65-45-12	GGG50/ GG25
5	Plug	Malleable Iron Galvanized	Carbon Steel
6	Bolt	Carbon Steel Zinc Plated	ANSI304,ANS I316
7	Flat Washer	Carbon Steel Zinc Plated	ANSI304,ANS I316
Size (Inch)		2"-16"	

Globle Valve



Material Specification			
Part No.	Part	Standard Specification	Options
1	Body	DIN/ANSI STANDARD	GGG50/GG25
2	Body Seat		Brass
3	Disc Seat		Brass
4	Disc		GGG50
5	Stem		Stainless Steel
6	Bonnet		GGG50
7	Gland		GGG50
8	Stem nut		Brass
9	Handwheel		GGG50
10	Nut		Carbon Steel
Size (Inch)		2"-12"	



Brass Valve



Brass Valve Series



Brass Ball Valve	
Technical Reference:	
Size	1/2"-4"
Nominal Pressure (Brass Body)	PN16/ 25
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body & Bonnet	
Nickel Plated & Standard port	



Brass Mini Ball Valve	
Technical Reference:	
Size	1/4", 3/8", 1/2"
Nominal Pressure (Brass Body)	PN16/ 25
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body&Bonnet	
Nickel Plated & Standard port	



Brass Ball Valve	
Technical Reference:	
Size	15mm, 20mm, 25mm, 30mm, 37mm
Nominal Pressure (Brass Body)	PN16/ 25
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body&Bonnet	
Nickel Plated & Standard Port	

Brass Bibcock Series



Brass Bibcock	
Technical Reference:	
Size	1/2"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water, Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body&Bonnet	
Nickel Plated	



Brass Bibcock	
Technical Reference:	
Size	1/2"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body&Bonnet	
Natural Color	



Brass Bibcock	
Technical Reference:	
Size	1/2", 3/4", 1"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body&Bonnet	
Nickel Plated	



Brass Bibcock	
Technical Reference:	
Size	1/2"×3/8", 1/2"×1/2", 1/2"×3/4"
Nominal Pressure (Brass Body)	PN10
Suitable Medium	Water, Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body & Bonnet	
Polished & Chrome Plate	



Brass Angle Valve	
Technical Reference:	
Size	1/2"×3/8", 1/2"×1/2", 1/2"×3/4"
Nominal Pressure (Brass Body)	PN10
Suitable Medium	Water, Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body & Bonnet	
Polished & Chrome Plate	



Brass Angle Valve	
Technical Reference:	
Size	1/2"×1/2"
Nominal Pressure (Brass Body)	PN10
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body & Bonnet	
Polished & Chrome Plate	

Related Product Display



Brass Gate Valve	
Technical Reference:	
Size	1/2", 3/4"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water, Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body&Bonnet	
Natural Color	



Brass Stop Valve	
Technical Reference:	
Size	1/2", 3/4"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water, Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body & Bonnet	
Natural Color	



Brass Foot Valve	
Technical Reference:	
Size	1/2", 3/4"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water, Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body & Bonnet	
Natural Color	



Brass Check Valve	
Technical Reference:	
Size	1/2"-4"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform To ISO-228-1:2000
Anti-Oxygen Glue Applied To Join Body & Bonnet	
Natural Color	



Brass Check Valve	
Technical Reference:	
Size	1/2"-4"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water, Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body & Bonnet	
Natural Color	



Brass Y Strainer	
Technical Reference:	
Size	1/2"-4"
Nominal Pressure (Brass Body)	PN25
Suitable Medium	Water,Non-Causticity Liquid Saturated Steam
Working Temperature	-10℃≤t≤110℃
Standard	Parallel Thread Conform to ISO-228-1:2000
Anti-Oxygen Glue Applied to Join Body& Bonnet	
Natural Color	



PPR Fittings
(White Gray Green)



90° Elbow	
Size(mm)	
20	90
25	110
32	160
40	/
50	/
63	/
75	/



45° Elbow	
Size(mm)	
20	90
25	110
32	160
40	/
50	/
63	/
75	/



Equal Tee	
Size(mm)	
20	90
25	110
32	160
40	/
50	/
63	/
75	/



CAP	
Size(mm)	
20	90
25	110
32	160
40	/
50	/
63	/
75	/



Equal Cross	
Size(mm)	
20×16	/
25×20	/
32×25	/
40×20	/
40×25	/
40×32	/
50×20	/



Female Thread Tee	
Size(mm)	
20×1/2"	/
20×3/4"	/
25×1/2"	/
25×3/4"	/
32×1/2"	/
32×3/4"	/
32×1"	/



Female Thread Elbow	
Size(mm)	
20×1/2"	/
25×3/4"	/
32×1"	/
40×11/4"	/
50×11/2"	/
63×2"	/
/	/




Male Thread Brass Union	
Size(mm)	
20×1/2"	/
25×3/4"	/
32×1"	/
40×11/4"	/
50×11/2"	/
63×2"	/
/	/

PPR & PVC Valve Series



Pvc Ball Valve (Socket, Thread)					
Size(mm)	20×1/2"	25×3/4"	32×1"	40×11/4"	50×11/2"
	63×2"	75×21/2"	90×3"	110×4"	/
Color	Grey	White	/	/	/
Features	Dedigned for all-direction;				
	Thermoplastic valve seat;				
	Low torque;				
	100% tested and no leakage;				
	Easy to service.				



Pvc Octagonal Ball Valve (Socket, Thread)					
Size(mm)	20×1/2"	25×3/4"	32×1"	40×11/4"	50×11/2"
	63×2"	75×21/2"	90×3"	110×4"	/
Color	Grey	White	Green	/	/
Features	Dedigned for all-direction;				
	Low torque;				
	100% tested and no leakage;				
	Easy to service;				
	Designed for straight angle and easy to install.				



Pvc Double Union Ball Valve (Socket, Thread)					
Size(mm)	20×1/2"	25×3/4"	32×1"	40×11/4"	50×11/2"
	63×2"	/	/	/	/
Color	Grey	White	/	/	/
Features	Thermoplastic valve seat;				
	Low torque;				
	Easy to operate;				
	100% tested and no leakage;				
	Dedigned for all-direction.				



PVC Butterfly Valve (Handle, Worm Gear)					
Size(mm)	75×21/2"	90×3"	110×4"	125×5"	160×6"
	200X8"	250×10"	/	/	/
Color	Grey	/	/	/	/
Features	Conforms to ISO Standard;				
	Small Bulk and Light Weight;				
	Small Fluid Resistance;				
	Start & Close Quickly;				
	Good Performance Under Low Pressure;				
	Regulator to Achieve a Good Seal.				


GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE



PPR Ball Valve (Plastic Ball, grass Ball)					
Size(mm)	20×1/2"	25×3/4"	32×1"	40×11/4"	50×11/2"
	63×2"	/	/	/	/
Color	Green	/	/	/	/
Features	Small Fluid Resistance, The Relatively Size is Small, Light Weight;				
	Easy to Service.sealing Performance;				
	Not Limited Mounting Direction;				
	The Flow Can be Arbitray No Vibration, Little Noise;				
	Start & Close Quickly.				



PPR Double Union Ball Valve					
Size(mm)	20×1/2"	25×3/4"	32×1"	40×11/4"	50×11/2"
	63×2"	/	/	/	/
Color	Grey	White	Green	/	/
Features	High Mechanical Properties, Easy to Install And Service;				
	Corrosion and High Pressure Resistant;				
	Sealing Performance to Ensure No Leakage.				
	/				
	/				



PPR Stop Valve					
Size(mm)	20×1/2"	25×3/4"	32×1"	40×11/4"	50×11/2"
	63×2"	/	/	/	/
Color	Grey	White	Green	/	/
Features	Simple Structure,operate and Service Easily;				
	Sealing Performance, Long Life Span;				
	Open & Close Time is Short ; Low Height.				
	/				
	/				



Plastic Faucet					
Size(mm)	20×1/2"	25×3/4"	/	/	/
	/	/	/	/	/
Color	Pink	Coffee	Blue	Purple	Yellow
	White	Green	According to Client's Requirement		
Features	Small and Delicacy;				
	Material: Abs, Pp, Pvc;				
	Corrosion Resistant, Anti-aging;				
	Non-rust, Non-toxic, High Pressure;				
	Resistant, Light Weight, Easy to Install.				

PVC-U Pipes & Fittings (White&Gray)



Solid Sewage Pipe	
Size(mm)	
50	/
75	/
110	/
125	/
160	/
200	/
250	/



90° Elbow	
Size(mm)	
20	90
25	110
32	125
40	160
50	200
63	/
75	/



Threadtee	
Size(mm)	
20	90
25	110
32	125
40	160
50	200
63	/
75	/



Coupling	
Size(mm)	
20	90
25	110
32	125
40	160
50	200
63	/
75	/



45° Elbow	
Size(mm)	
20	90
25	110
32	125
40	160
50	200
63	/
75	/



Reduceing Tee	
Size(mm)	
25×20	50×40
32×20	63×40
32×25	63×50
40×20	75×50
40×25	75×63
40×32	90×50
50×20	90×63



End Cap	
Size(mm)	
50	/
75	/
110	/
160	/
/	/
/	/
/	/



Cross	
Size(mm)	
25×20	63×50
32×20	75×40
32×25	75×50
40×20	75×63
40×25	90×50
40×32	90×63
50×20	90×75



45° Elbow	
Size(mm)	
20	90
25	110
32	125
40	160
50	200
63	/
75	/



90° Elbow	
Size(mm)	
20	90
25	110
32	125
40	160
50	200
63	/
75	/



Male Thread Coupling	
Size(mm)	
50	/
75	/
110	/
160	/
/	/
/	/
/	/



Cubic Cross
Size(mm)
110×110×110×50
110×110×110×75
/
/
/
/
/



Deep Drain	
Size(mm)	
50	/
75	/
110	/
/	/
/	/
/	/
/	/



Extension Joint	
Size(mm)	
50	/
75	/
110	/
160	/
200	/
/	/
/	/



Floor Drain	
Size(mm)	
50	/
75	/
/	/
/	/
/	/
/	/
/	/



P Trap	
Size(mm)	
50	/
75	/
110	/
/	/
/	/
/	/
/	/